

DATA SHEET USED MACHINE



(picture shows used machine)

Equipment machine - factory tested:

- without side edge
- water tank 90L / 24 gal
- new touch operating panel
- replacement of all wear parts such as splash protection, feed rings etc.
- drive motors mechanically + electrically tested, insulation test
- pneumatics + control technology in full functionality
- paint / coating repaired
- new customer service

Condition of tools:

- dressing diamond: 60 out of 100 %
- grinding stone: Ø 271 mm out of 300 mm
- new grinding belt



Combined belt-stone grinding machine PROFI 4

The combined belt stone grinding machine PROFI 4 has a pneumatic lifting device with a foldable feed roller. For alpine skiing, the stone can be dressed with two different structures. A multi-part feed roller compensates for concave or convex boards. The pressure weight is designed so that snowboards, alpine skis and cross-country skis can be ground.

MACHINE TYPE:	PROFI 4
G-NUMBER:	G1071560
CONSTRUCTION YEAR:	2005
CONDITION:	factory tested

PRICE AND AVAILABILITY ON REQUEST.

Our terms and conditions apply to this offer: <https://www.reichmann.com/en/footer/terms>

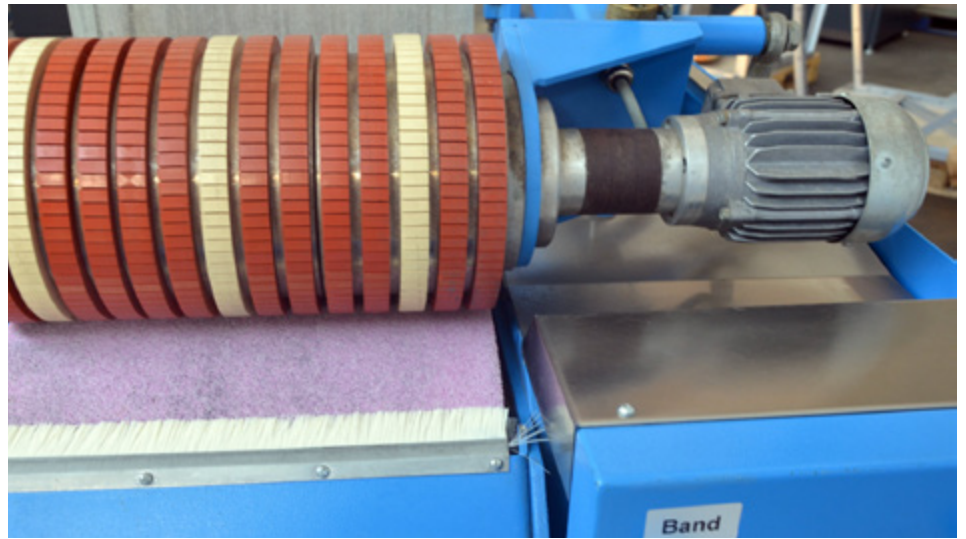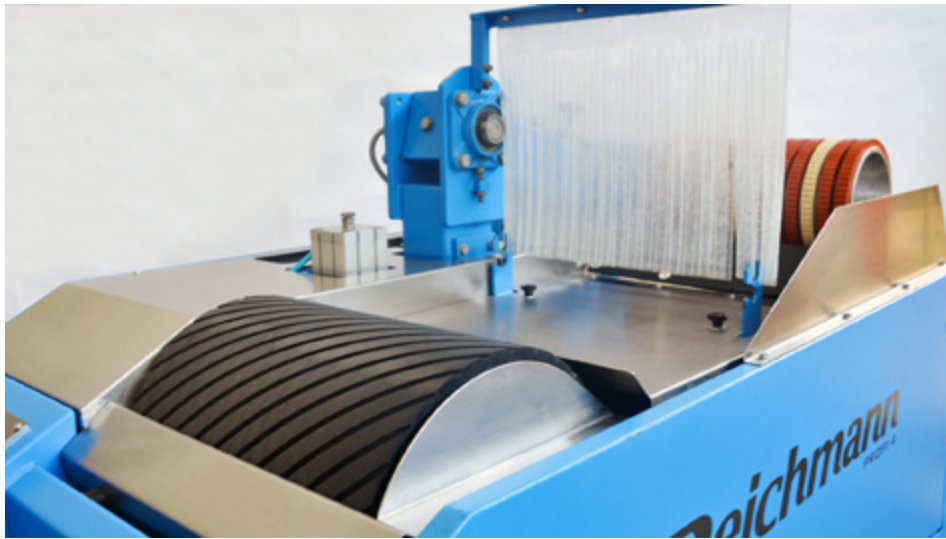

(original pictures of the used machine)

TECHNICAL DATA

Dimensions (L x W x H) in mm	1420 x 1040 x 1320
Weight in kg	700
Connecting voltage	380–415 V, 50 Hz., 3 PH/N/PE
Connecting power in kW	7
Compressed air supply in bar	6
Dimensions grinding belt	350 x 1500 mm
Dimensions grinding stone	∅ 300 x 350 mm
Stone speed	stepless
Belt speed	500/1000 U/min.
Dressing speed	stepless
Feed speed	stepless
Coolant tank in l	90
Contact pressure feed in kg	
Stone side	10–60
Belt side	10–60

